


ASSEMBLY INSTRUCTIONS

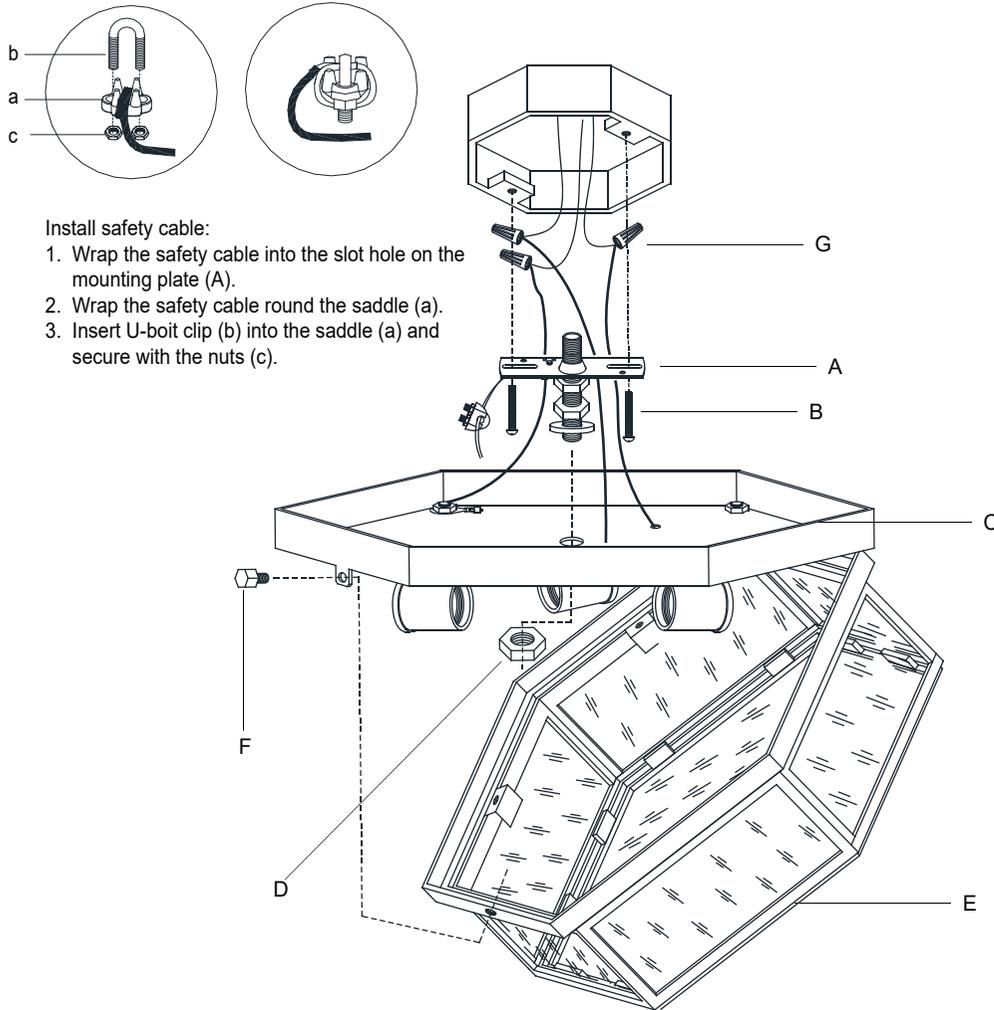

Install safety cable:

1. Wrap the safety cable into the slot hole on the mounting plate (A).
2. Wrap the safety cable round the saddle (a).
3. Insert U-boit clip (b) into the saddle (a) and secure with the nuts (c).

Berling Large Flush Mount

Item # RL19023

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

1. Carefully remove all parts from the box. Place on a clean, soft surface.
2. Open the fixture cage (E) by loosening the thumbscrew (F).
3. Remove the mounting plate (A) from the fixture body (C) by loosening the nut (D).
4. Install the mounting plate (A) to the junction box and secure with the mounting screws (B) provided.
5. Connect the safety cable as shown in figure.
6. Wrap the fixture ground wire to the green ground screw on the mounting plate (A) and secure, then connect to the ground wire in the junction box using the wire nut (G).
IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
7. Connect the fixture white wire to the neutral wire in the junction box using the wire nut (G).
8. Connect the fixture black wire to the hot wire in the junction box using the wire nut (G).
DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OTHERWISE SAFETY WILL BE COMPROMISED.
9. Tuck the wire connections neatly into the junction box carefully.
10. Install the fixture body (C) to the mounting plate (A) and secure with the nut (D).
11. Insert light bulbs (not included) into the sockets.
12. Close the fixture cage (E) by secure the thumbscrew (F).
13. Installation is complete, turn on power at fuse or circuit breaker.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.

RALPH LAUREN

