
ASSEMBLY INSTRUCTIONS

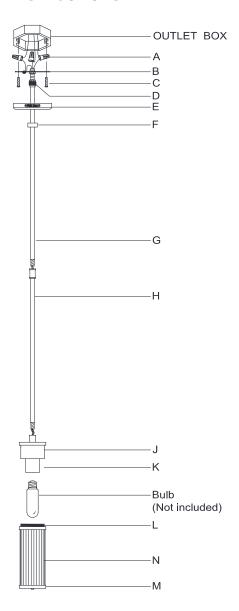

Allen Mini Pendant

Item # RL 5080

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 1. Carefully remove all parts from the box.
- 2. Thread the tube (H) to the top cap (J), then thread the tube (G) to the tube (H).
- 3. Loosen the lock collar (F) and let the canopy (E) slide down the tube
- 4. Affix the mounting plate (B) with ceiling loop (D) onto the outlet box and secure with mounting screws (C).
- 5. Cut the cord up through 15" length beyond the canopy.
- 6. Connect the fixture Ground (bare) wire with the ground wire from the outlet box using wire nut (A). If your house does not have ground wire, then attach this wire to the green grounding screw inside of the outlet box.
 - IT IS IMPERATIVE THAT THIS FIXTURE BE GROUNDED.
- 7. Connect the fixture Neutral (ribbed, no markings) wire with the neutral wire from the outlet box using wire nut (A).
- 8. Connect the fixture Hot (smooth edge, markings) wire with the hot wire from the outlet box using wire nut (A). DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 9. Tuck these wire connections neatly into the outlet box to secure.
- 10. Attach canopy (E) to the mounting plate (B) and secure with lock collar (F).












ASSEMBLY INSTRUCTIONS

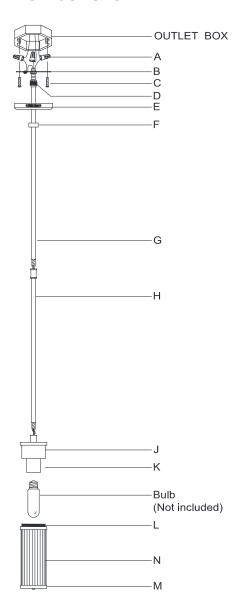

Allen Mini Pendant

Item # RL 5080

NOTICE:

This light fixture should be installed in accordance with all applicable, local installation codes, and by a person familiar with the construction and operation of it, as well as the hazards involved. Inspect item and contents carefully. If any damage or defect is found, do not install. Retain all packaging material until installation is complete and approved.

- 11. Insert bulb (not included) into the socket (K).
- Attach the glass frame (N) to the top cap (J).
 Do not touch glass frame (N) and top cap (M),only hold bottom ring (L) during assembly.
- 13. Installation is complete, turn on power at fuse or circuit breaker.

Care Instructions: Clean only with a soft dry cloth or feather duster. Do not use abrasive or chemical agents.







